
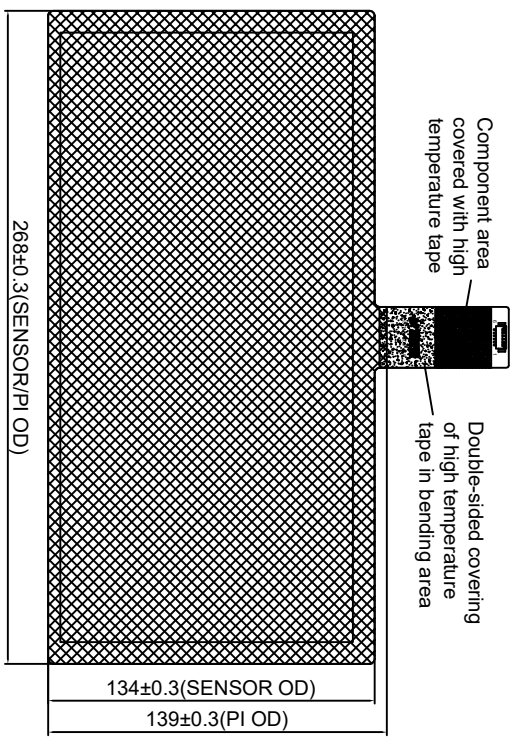
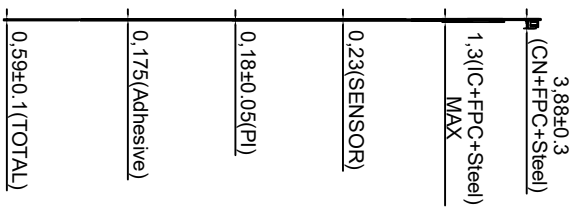



No ROHS hazardous material

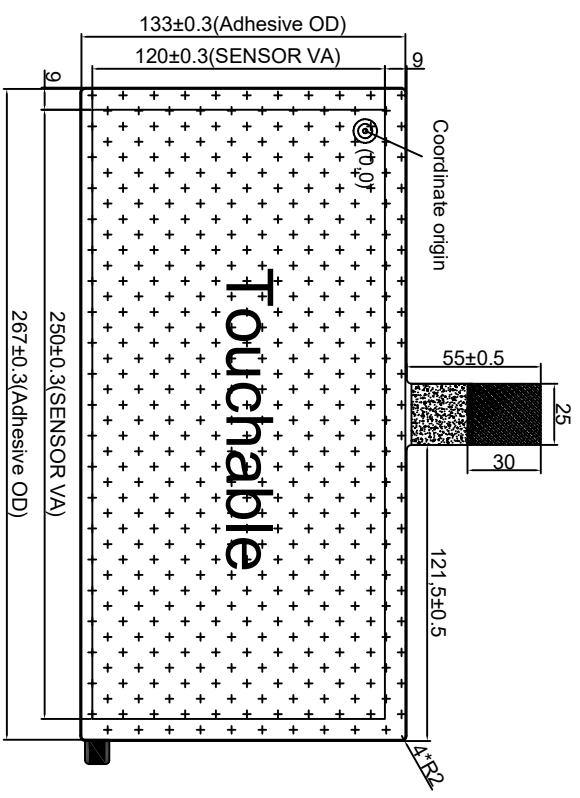

Connector: Molex 53261-0671

NOTE!
The touch screen resolution evaluation is set to 2500*1200, Or according to customer needs

With touch function face

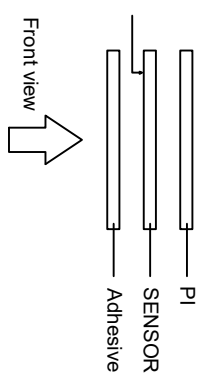

Adhesive: 3M9495 (3001e)

Front view

Side view

Back view

TP Technical parameters

1. Interfaces	L2C	7. Humidity range	45~85%RH
2. Structure	AD+P+PI	8. Transmittance	\
3. IC solutions	CY7MA5668	9. Hardness	≥3H
4. Impact	30.00DIA. Steel Ball 1 / 132g / 90° / 100mm / 1time	10. Operate	-20°C~+70°C, ≤85%RH
5. Touch points	10 points	11. Storage	-30°C~+80°C, ≤85%RH
6. Power supply	3.3V	12. Unmarked dimension tolerance	as±0.3

TP PIN:

1	GND
2	SDA(3.3V)
3	SCL(3.3V)
4	VDD(3.3V)
5	INT(3.3V)
6	REST



杭州宏梟科技有限公司
GraHowlet Technology CO., Ltd

Model	HX1101803		View direction		Unit	MM	
Version	V1.0	Designer	LU0	Date	2022-05-20	Edition	A1
Cus tommer		Approved		Date		Proportion	1:1